


## Plates Energofloor® Pipelock Solo

### Description



Plates Energofloor® Pipelock Solo plates with fixers are developed especially for fast and convenient laying down of pipes for «floor heating» systems in any directions. Reliable connection of plates «in lock» allows to create a uniform layer, which can be laid down on any insulating material in the construction of the floor heating systems with the subsequent arrangement of cement-sand cap. Plates are made of high-strength polystyrene and withstand the adult's weight during mounting. Thanks to absence of a insulation layer of a plate it is possible to transport and store with the maximum saving of space that considerably reduces the price of logistics.

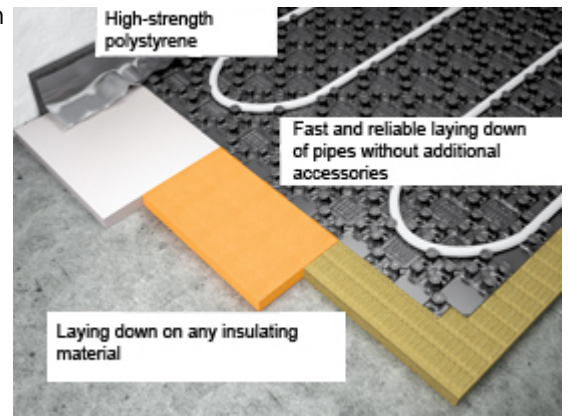

Laying down on any insulating material.



- Fast and convenient connection «in lock» with creation of a uniform layer.
- Laying down of pipes without additional accessories on a straight line and diagonal.



The optimum sizes, calculated under an europallet, considerably reduce the price of logistics of transportations and warehousing.



### Specifications



#### Specifications

Feature	Value	Method
Maximum service temperature, °C	+70	TS 22.21.41-016-59705109-2012
Printing step, mm	50	TS 22.21.41-016-59705109-2012
Diameter of fixed pipes, mm	14-16	TS 22.21.41-016-59705109-2012
Relief height for pipes fixing, mm	17	TS 22.21.41-016-59705109-2012

### Range



## Range

Item	Article	Width	Length	Quantity per package
Plate Energofloor® Pipelock Solo 1,1-0,7	EFRP0/71/1PLKSOL	0,7 m	1,1 m	20 pcs.

## Packaging



### Packed in cardboard boxes with dimensions of 788 x 1173 x 199 mm

Standart size	Width, m	Lenght, m	Quantity per package, pcs.	Gross weight, kg	Package volume, m <sup>3</sup>
Plate Energofloor® Pipelock Solo 1,1-0,7	0,7	1,1	20	23,82	0,184