




System of insulation ready to application for floor heating

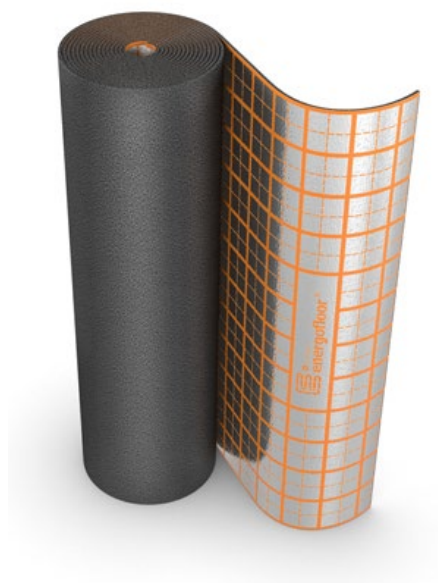

<b>Maximum service temperature</b>	$\lambda_{20}$
+ 70°C	$\leq 0,039 \text{ W/(m}\cdot\text{°C)}$

Indicator	Value
Water absorption by volume at full immersion within 24 h, no more	1,0 %
Aluminum foil thickness	30 mkm
Printing step	50 mm

- The professional insulating material developed specially for floor heating systems
- Aluminum foil 30 micrometers thickness evenly distributes heat from heating elements on all surface of a floor
- The polymeric layer protects a foil from aggressive influence of a cement coupler
- Marking for convenience of laying of heating elements
- Small thickness of a material allows to lower general thickness of a design



Sheets (rolls) from polyethylene foam, covered with an aluminum foil with a marking and chemically resistant polymeric film

Item	Article	Thickness, mm	Width, m	Length, m	Quantity per package, m <sup>2</sup>	Price without VAT, RUB/m <sup>2</sup>
3/1,0-30	EFRR03130COM	3	1	30	30	366,34
5/1,0-20	EFRR05120COM	5	1	20	20	461,32

Packed into cartons with dimensions of 1020 x 395 x 395 mm, package volume 0,160 m<sup>3</sup>.

#### Accessories

Item	Article	Unit of measurement	Price without VAT, RUB
Damper tape Energofloor® Super 10/0,1-11	EFRL1010011DM	roll	591,86
Damper tape Energofloor® Super 10/0,15-11	EFRL1015011DM	roll	1065,38
Montage knife Energopro®	EPRKNIFE	piece	3760,35

Price list dd. March 4, 2024